
Monitoring and Adaptive Management


Dr. Paul R. Schroeder

Paul.R.Schroeder@usace.army.mil



RISK FRAMEWORK

RISK ASSESSMENT PARADIGM

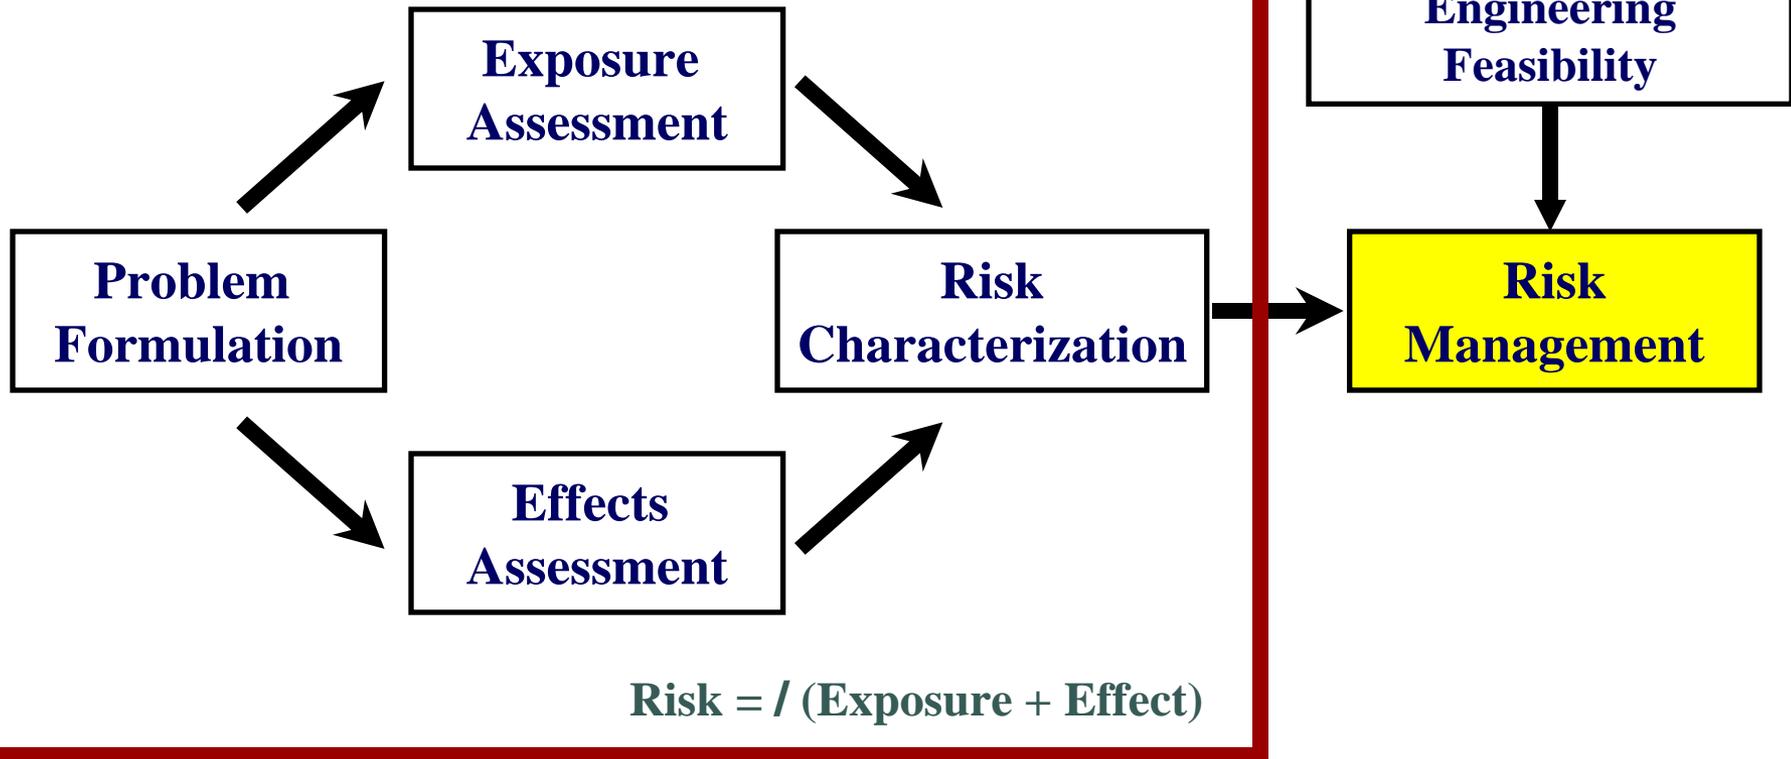

Topics

- **Uncertainty and the Role of Monitoring**
- **Compliance Monitoring and Adaptive Management**
- **Development of a Monitoring Plan**
- **Monitoring Considerations**
- **Monitoring Components**
- **Adaptive Management**
- **Adaptive Management Components**
- **Example Case Study**



Roles of Monitoring

- **Traditionally**

- To assure compliance with regulatory requirements
- Water and air sampling at points of compliance for comparison with water and air quality standards

- **Adaptively**

- To support the risk paradigm
- To address uncertainties in exposure data and source strength
- To address uncertainties in effects data
- To learn from the project and provide data for future assessments
- To support adaptive risk management alternatives
- To assure effectiveness of control measures
- To assure compliance with risk goals and regulatory requirements



Development of a Monitoring Plan

- **What?** **Parameters to be Monitored**
- **Where?** **Locations**
- **When?** **Frequency**
- **How?** **Techniques**
- **Who?** **Resources: budget, equipment, time and skills**
- **Why?** **Data Calibration, Processing and Analysis and Reporting**
- **OK?** **Does it satisfy the objectives?**



Monitoring Considerations

- **Unsteady Source**
 - Dredging is intermittent, processes are cyclic
- **Moving Source**
 - Hopper dredge travels more than 5 miles in a 60-minute cycle
 - Cutterhead swings over a width of 22 - 250 ft at a rate of 0.5 - 1 ft/sec
 - Auger dredges advances about 500 ft/hr
- **Multiple Sources**
 - Dredgehead, overflow, props, anchors, etc.
 - Bottom and surface
- **Unsteady Flow**
 - Tides
 - Wind
- **Exposure Pathway for Receptors of Concern**




Stressors and Components

- **Turbidity and TSS**

- Discrete samples from multiple depths and locations
- Continuous discrete locations – OBS grid
- Periodic transects – ADCP
- Calibration samples to estimate TSS from OBS and ADCP

- **Total Mass Loss and Loss Rate**

- TSS (requires background sampling as well)
- Flow
 - ADCP
 - Gages
 - Current meter transects
 - Models

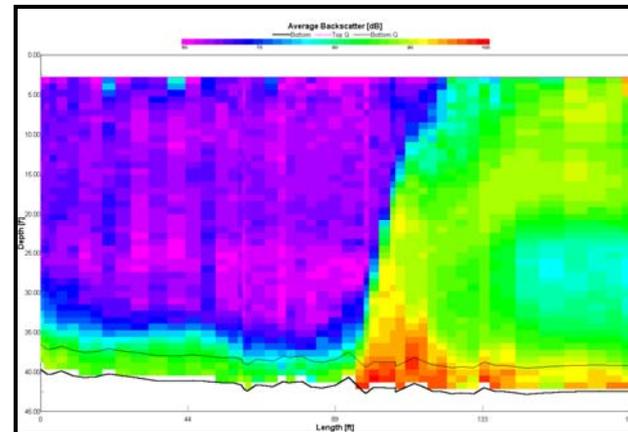

Stressors and Components

- **Deposition**
 - TSS
 - Settling characteristics
 - Shear stress characteristics
 - Sediment traps
 - Modeling
- **Total Contaminant Mass Loss and Loss Rate**
 - Discrete samples from multiple depths and locations analyzed for TSS, dissolved and total contaminant concentration
 - TSS
 - Flow
 - Sediment density, volume and bulk sediment contaminant concentrations



Adaptive Management

- **Traditional Approach**
 - Implement controls
 - Monitor to ensure risk goals are being attained
- **Adaptive approach**
 - Implement initial controls
 - Monitor
 - Assess impact/efficiency of controls
 - Adapt controls and possibly increase or reduce controls



Adaptive Management

- **Adaptive management should be used when:**
 - High degree of uncertainty in the risk characterization
 - High degree of uncertainty in the effectiveness risk management controls
 - High costs of risk management
- **Adaptive management leads to:**
 - Learning and a better explanation/understanding of the system
 - Increase effectiveness of risk management
 - Lower costs
 - Better decisions



Adaptive Management Approach

- **Develop short-term and long-term control alternatives**
 - Turbidity and TSS concentrations
 - Contaminants concentrations
 - Flux (flow augmentation)
 - Total loss
- **Establish action triggers for the risk management**
 - Effects-based criteria
 - Exposure modeling
 - Risk characterization
- **Develop a control plan and implement**
- **Establish an active compliance monitoring plan and implement**



Adaptive Management Approach

- **Establish a response plan for triggers**
 - Implement short-term control measures (such as stop overflowing or pause dredging)
 - Assess impacts
 - Analyze event data – cause and effect -- learn
 - Determine need for long-term controls
 - Implement long-term controls (such as slow production, install silt curtain, restrict overflow or seasonal restriction)
 - Assess impacts
- **Update control, monitoring and response plans**
- **Perform ecological response monitoring of environmental resources to ensure that effects-based triggers are effective at achieving risk goals**



Toddaho Adaptive Management

- **Risk Characterization Results**
 - Minor to moderate effects on juvenile salmonids
 - Potential burial of fish eggs; particularly from open water placement by hopper dredge
 - No exposure pathway to mussel bed
- **Risk Management Control Options**
 - Environmental bucket instead of open bucket
 - Silt curtains for clamshell dredging
 - Managed placement (spread placement along upstream side of open water placement site)
 - Seasonal restriction / environmental window
- **Action Triggers**
 - Turbidity greater than 10 NTU above background midway between channel and spawning habitat
 - Turbidity greater than 100 NTU in upper 15 ft of channel bottleneck



Toddaho Adaptive Management

- **Initial Controls**

- Environmental bucket

- **Monitoring plan**

- Three ADCP transects daily midway between channel and spawning habitat and midway between placement site and spawning habitat for first 3 days
- TSS calibration sampling
- Three transects twice a week thereafter
- Additional transects if change in currents and wind
- Surficial turbidity/TSS sampling in channel bottleneck



Toddaho Adaptive Management

- **Response Plan**
 - If turbidity transport is greater than trigger at dredging site, install silt curtain in adjacent reaches.
 - If turbidity transport is greater than trigger at placement site, dispose from stationary position under favorable currents.
 - If turbidity in fish passage is greater than trigger, install silt curtain or decrease bucket speed.
 - If turbidity is greater than 300% of triggers on three consecutive monitoring passes, stop dredging and impose environmental window.
- **Update controls, monitoring and response plan**
 - If turbidity is still greater than triggers with controls, stop dredging and impose environmental window.
 - If turbidity transport is still greater than trigger at placement site, dispose into CDF.



Questions?

